

FEATURES

- **Massively integrated system-on-a-chip**
 - High-speed CPU and all major system peripherals incorporated
 - Minimized need for external components
 - Maximum design simplicity
- **CRT/LCD controller**
 - Unified Memory Architecture (UMA)
 - Resolutions up to 1024 × 768 (XGA)
 - 256-entry 28-bit video palette
 - Up to 16 million colors
 - Up to 120-MHz pixel clock rates for flicker-free screen refresh
 - Supports single- and dual-scan LCD panels
 - 16-level grayscale
 - Hardware cursor for all display modes
- **Performance matching 100-MHz Intel® '486-based PC**
- **32-bit ARM710A microprocessor**
 - ARM7 CPU

**High-Performance
System-on-a-Chip
with CRT/LCD Controller**


OVERVIEW

The CL-PS7500FE is a massively integrated general-purpose 'system-on-a-chip' designed for a wide range of control and communications applications. Based on a low-power, high-speed ARM® RISC CPU core, the CL-PS7500FE integrates a powerful 50-MIPS processor, hardware floating point unit, memory interfaces, and a full complement of system peripherals onto a single chip. This integrated chip greatly simplifies system design for complex applications such as network computers, set-top boxes, screen phones, process control systems, and instrumentation control.

(cont.)

(cont.)

FUNCTIONAL BLOCK DIAGRAM

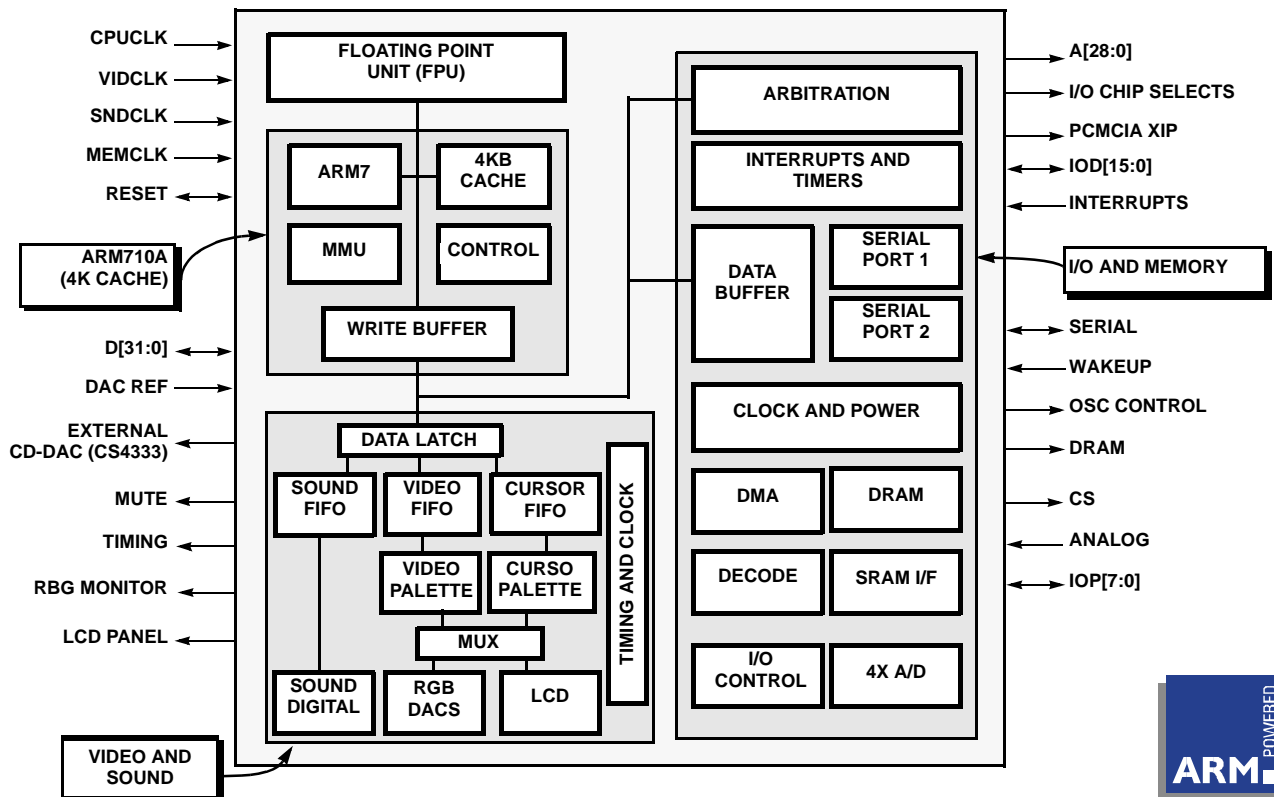

FEATURES (cont.)

- 4 Kbytes of unified cache
- MMU with 64-entry TLB (transition look-aside buffer)
- 8-words-deep write buffer
- **Hardware FPU**
 - Implements ANSI/IEEE Std. 754-1985
 - Single, double, and extended precision
 - Up to 12 Mflops, double-precision FP
 - Ideal for Java™
- **DRAM controller**
 - Supports EDO and Fast Page Mode DRAMs
 - Up to 132 Mbps (peak) throughput using 64-MHz memory clock and 32-bit-wide DRAMs
 - Programmable 16- or 32-bit-wide memory system
 - Pipelined speed-critical paths
- **ROM/FLASH memory control**
 - Supports two 16-Mbyte banks
 - Individual read timings
 - Burst mode reads
 - Allows for writes under register control for FLASH
- **Two PS/2®-style serial ports**
 - Keyboard
 - Mouse
- **16-bit ISA-style I/O bus**
 - Allows for connection to industry-standard peripheral devices
 - CS89XX Ethernet controller
 - 56K Fax/modem chipset
 - Can be expanded to 32 bits with external transceivers
- **Serial CD-quality digital sound (32-bit) output**
- **Three-state power management**
- **Eight general-purpose I/O lines**
- **Four analog comparators**
 - Supports analog joystick
- **Timer and counters**
- **Available in 40- and 56-MHz speed grades**
- **240-pin MQFP package**
- **Evaluation kit available with BOM, schematics, and design database**

OVERVIEW (cont.)

In addition to the 32-bit processor with a hardware floating point unit, the CL-PS7500FE incorporates system cache, a MMU (memory management unit), a high-resolution color CRT/LCD graphics controller, a CD-quality audio controller, and various other peripheral interfaces.

Display Interface

The display controller section of the CL-PS7500FE features direct drive of an RGB color monitor or a color LCD. It supports up to a 120-MHz pixel clock rate for flicker-free screen refreshes at resolutions up to the XGA 1024 x 768. It also incorporates various sync signals; when combined with an external encoder device, these signals permit the use of interlaced television monitors for display. A hardware cursor is supported in all display modes to minimize system overhead during cursor updates.

The CL-PS7500FE makes use of an UMA (unified memory architecture) that allows for a design to share system memory between the display function and the program memory. This eliminates the need

for separate memory blocks for display and program memory and reduces overall system costs. A dedicated high-speed DMA channel is used to control screen updates and minimize the overall system bandwidth devoted to display requirements.

I/O and Memory

In addition to the advanced peripherals incorporated into the CL-PS7500FE, a wide variety of Cirrus Logic and industry-standard third-party peripheral functions can be attached through the CL-PS7500FE's integrated 16-bit ISA-style I/O bus and eight general-purpose I/O signals. Peripherals such as modems, mass storage subsystems, CCD cameras, data acquisition subsystems, and bar code readers can easily be interfaced to the CL-PS7500FE through these connections. For example, the Cirrus Logic CS8900A Ethernet controller can be easily attached for high-speed network communications. The device also has direct connections for a PS/2-style keyboard and a mouse as well as a serial CD-quality stereo audio output.

For high performance, the built-in memory controller in the CL-PS7500FE supports EDO DRAMs. DRAMs can interface directly to the CL-PS7500FE in up to 4 separate banks for maximum design flexibility.

Speed Grades

The CL-PS7500FE is available in two speed grades:

- ARM CPU running at 40 MHz; memory clock running up to 64 MHz
- ARM CPU running at 56 MHz; memory clock running up to 64 MHz

Packaging


The CL-PS7500FE is available in a 240-pin MQFP package.

ARM® Compatibility

The ARM processor architecture is quickly becoming the industry's 32-bit standard. Investment protection in software and hardware designs is insured with over 30 companies building products based on this open, standard processor core. In addition, a wide range of realtime kernels, sophisticated operating systems, and state-of-the-art application development tools are available from third parties worldwide.

System Design

As shown in the system block diagram below, simply adding desired memory and peripherals to the highly integrated CL-PS7500FE completes a high-performance system board. All the interface logic is integrated on-chip.

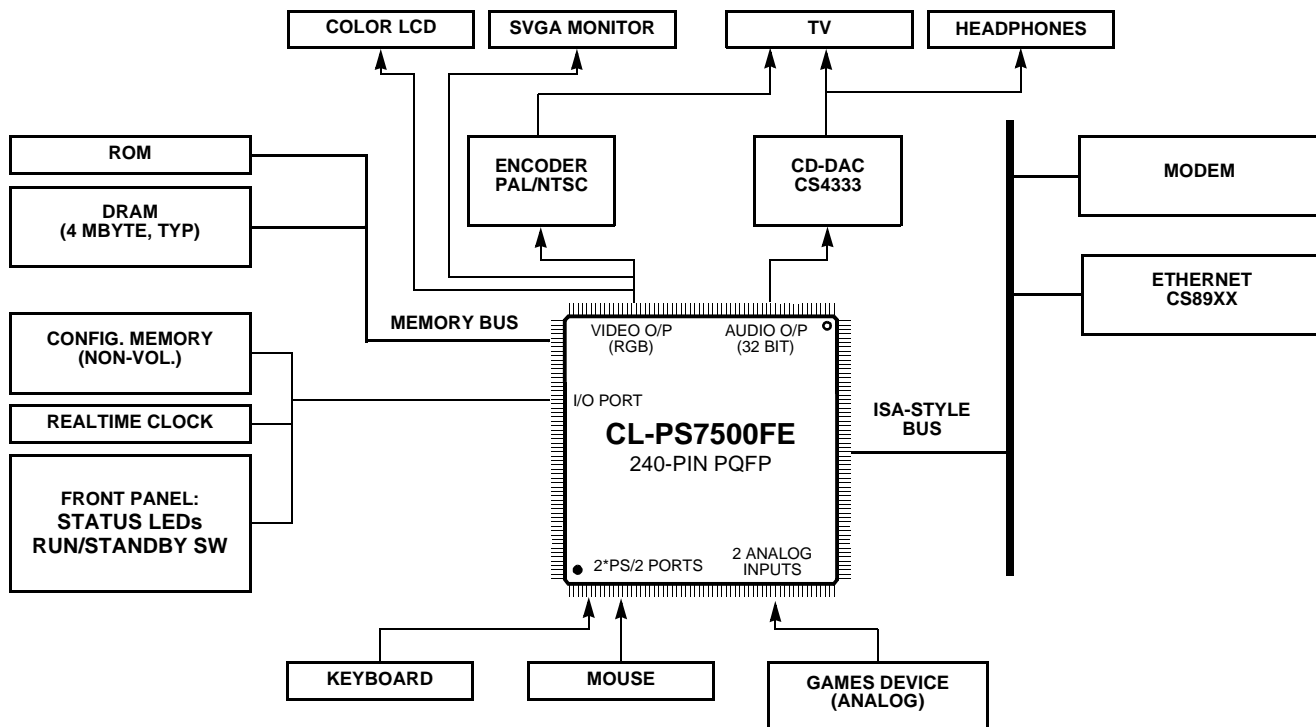

A CL-PS7500FE-Based System

Direct Sales Offices**Domestic****NORTHERN CA**

Fremont
TEL: 510/623-8300
FAX: 510/252-6020

SOUTHERN CA

Los Angeles
TEL: 310/820-6489
FAX: 310/820-6180

NORTHWESTERN AREA

Portland, OR
TEL: 503/620-5547
FAX: 503/620-5665

SOUTH CENTRAL AREA

Austin, TX
TEL: 512/338-1831
FAX: 512/339-0196

CENTRAL AREA

Chicago, IL
TEL: 847/884-6750
FAX: 847/884-6795

MID-ATLANTIC AREA

Columbia, MD
TEL: 410/740-5654
FAX: 410/740-6961

SOUTHEASTERN AREA

Raleigh, NC
TEL: 919/859-5210
FAX: 919/859-5334
Boca Raton, FL
TEL: 561/395-1613
FAX: 561/395-1373

International**FRANCE**

Paris
TEL: 33/1-48-12-2812
FAX: 33/1-48-12-2810

GERMANY

Herrsching
TEL: 49/81-52-92460
FAX: 49/81-52-924699

HONG KONG

Kowloon
TEL: 852-2376-0801
FAX: 852-2375-1202

JAPAN

Tokyo
TEL: 81/3-3340-9111
FAX: 81/3-3340-9120

KOREA

Seoul
TEL: 82/2-565-8561
FAX: 82/2-565-8565

SINGAPORE

TEL: 65/743-4111
FAX: 65/742-4111

TAIWAN

Taipei
TEL: 886/2-2718-4533
FAX: 886/2-2718-4526

UNITED KINGDOM

Bucks, England
TEL: 44/01628-472211
FAX: 44/01628-486114

Cirrus Logic...where Analog meets Digital™

Cirrus Logic is a premier supplier of precision linear circuits and mixed-signal system-level chip solutions, the latter of which demand high-performance mixed-signal processing, embedded DSP, algorithms and firmware. The company's products, sold under its own name and the Crystal® product brand, enable high-volume applications in mass storage, communications, consumer electronics and industrial markets.

With more than 800 patents (issued and pending), Cirrus Logic continues to expand its intellectual property portfolio through R&D investments. Approximately 40 percent of the company's patents involve mixed-signal technology, a key to innovating system-on-chip solutions. Over the past decade, Cirrus Logic has achieved more than 50 industry firsts, many of which have set new standards within their respective markets.

To learn how your Cirrus Logic can add high value and differentiation to your products, contact one of our system and applications specialists today.

Copyright © 1999 Cirrus Logic, Inc. All rights reserved. Printed in USA.

Cirrus Logic, Inc. has made best efforts to ensure that the information contained in this document is accurate and reliable. However, the information is subject to change without notice and is provided "AS IS" without warranty of any kind (express or implied). No responsibility is assumed by Cirrus Logic, Inc. for the use of this information, nor for infringements of patents or other rights of third parties. This document is the property of Cirrus Logic, Inc. and implies no license under patents, copyrights, trademarks, or trade secrets. Furthermore, no part of this publication may be used as a basis for manufacture or sale of any items without the prior written consent of Cirrus Logic, Inc. The names of products of Cirrus Logic, Inc. or other vendors and suppliers appearing in this document may be trademarks or service marks of their respective owners, which may be registered in some jurisdictions. A list of Cirrus Logic, Inc. trademarks and service marks can be found at <http://www.cirrus.com>.